


产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)	
1	型号 (Model)	AZURE-7526ML12M	14	视场角 F.O.V (DxVxH)	1.1" 2/3 1/2	
2	物料代码 (Material Code)	3. A01. 010008-A			D	7.53 4.80 3.65
3	靶面格式 (Image Format)	1.1"			H	6.05 3.96 3.04
4	分辨率 (Resolution)	150lp/mm			V	4.65 3.12 2.43
5	焦距 (Focal Length)	75mm	15	接口 (Mount)	C	
6	后截距 (Back Focus)	15.76mm	16	适用物距 (Suitable Distance)	0.3~∞m	
7	F值 (F/ No.)	2.6	17	最佳物距 (Optimum Working Distance)		
8	光圈 (Iris Type)	M-Iris	18	镀膜 (Coating)	400-900nm	
9	畸变 (Distortion)	<-0.35%	19	外形尺寸 (Dimension)	φ 50×95.41mm	
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ 27.29mm	20	重量 (Weight)	g
		后面 (Back)	φ 15.9mm	21	工作温度 (Operating Temperature)	-20~+65℃
11	相对照度 (Relative Illuminate)	87.5%	22	镜头组成 (Lens Construction)	11-7	
12	光学总长 (TTL)	91-123.1mm	23	最大主光线入射角 (CRA)	7.48°	
13	设计波长 (Design Wavelength)	400-700nm	24	滤镜尺寸 (Filter Thread)	M34×0.5	

Size:

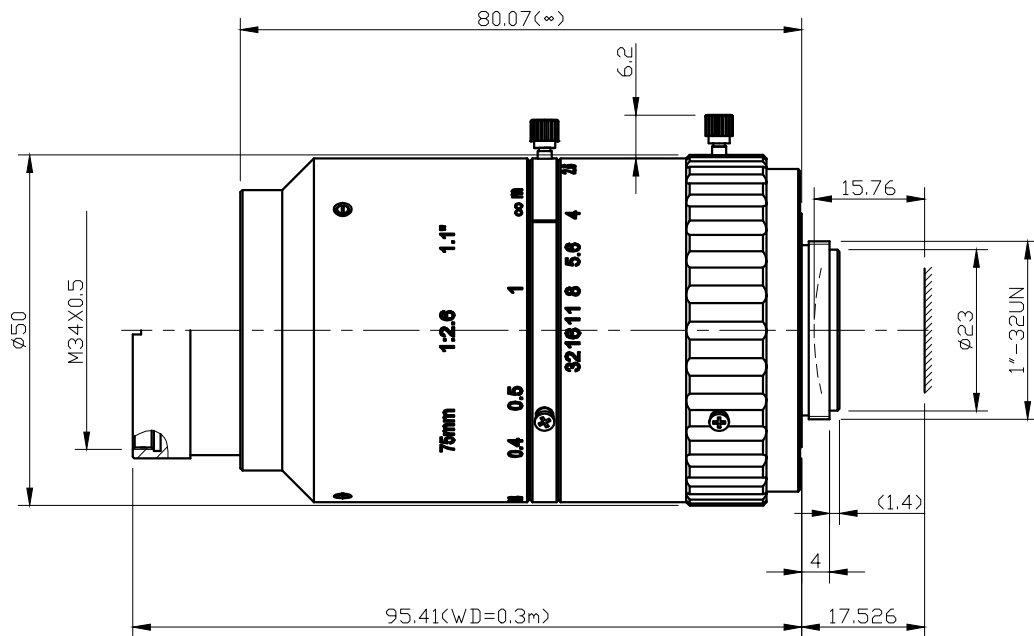

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd