

Xenon-Topaz 2.4/6.5

The Xenon-Topaz 2.4/6.5 is part of the robust C-mount lens series for 1.1" sensor. Optimized for 0.3 m to infinity working distance and equipped with 400 - 1000 nm broadband AR-coating this lens is the ideal choice to be used in measurement systems in harsh environmental, as traffic surveillance or robot vision. Lenses with 25 mm, 30 mm, 38 mm and 50 mm focal length complete the Xenon-Topaz series.





Key features

- Wide angle C-mount lens for 1.1" sensors
- Optimized for 0.3 m to infinity working distance
- Broadband coating (400 - 1000 nm)
- Vibration insensitivity for stable imaging performance


Applications

- Traffic surveillance
- Railway inspection
- Robot vision
- Aviation and aerospace


Name	Xenon-Topaz 2.4/6.5
Type	-0904
ID	1088899
Interface	C-mount
Net weight [g]	165
Focal length [mm]	6.5
F/# range	F/2.4 ... F/16
Numerical aperture	0.21
Max. sensor size [mm]	17.6
Max. angle of view ∞ [°]	114
Rec. magnification range	-0.02
Rec. working distance range [mm]	311
Max. mechanical focus travel [mm]	7
Filter thread [mm]	M82 x 0.75
Storage temperature [°C]	-25 ... +70
Pixel size	3.65
f'_{eff} [mm]	6.49
SF [mm]	13.74
S'F' [mm]	11.22
HH' [mm]	38.62
$\beta'P$	4.193
SEP [mm]	15.28
S'AP [mm]	-15.95
Σd [mm]	54.11

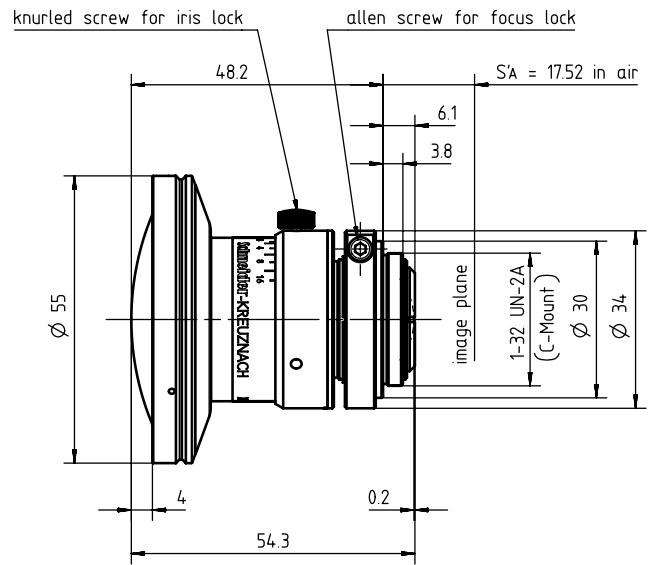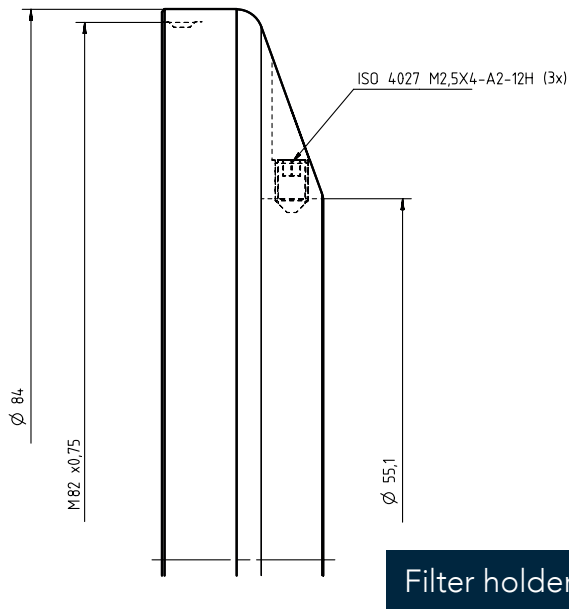


Distortion vs. image height

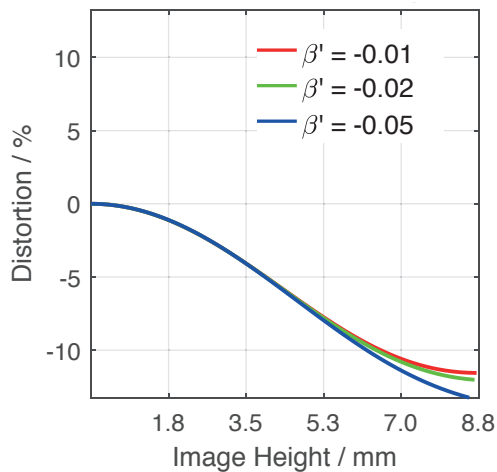

Transmittance vs. wavelength

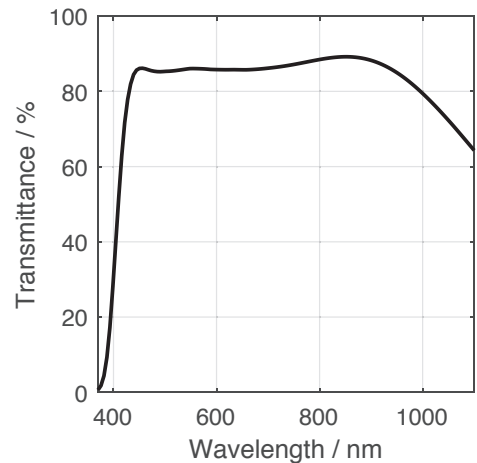


Relative illumination vs. image height

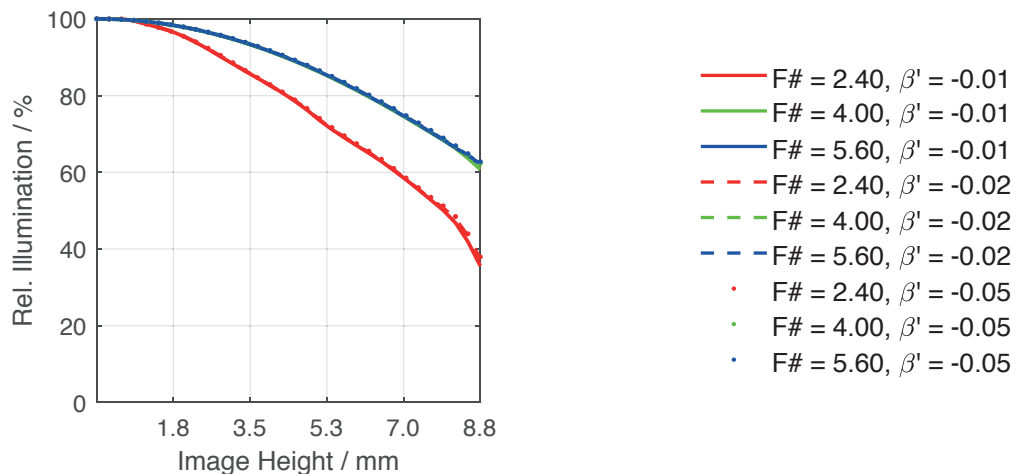

Spectrum name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Rel. weights	8	16	23	22	19	13

- 20.0 lp/mm, tangential
- 40.0 lp/mm, tangential
- 80.0 lp/mm, tangential
- 20.0 lp/mm, radial
- 40.0 lp/mm, radial
- 80.0 lp/mm, radial

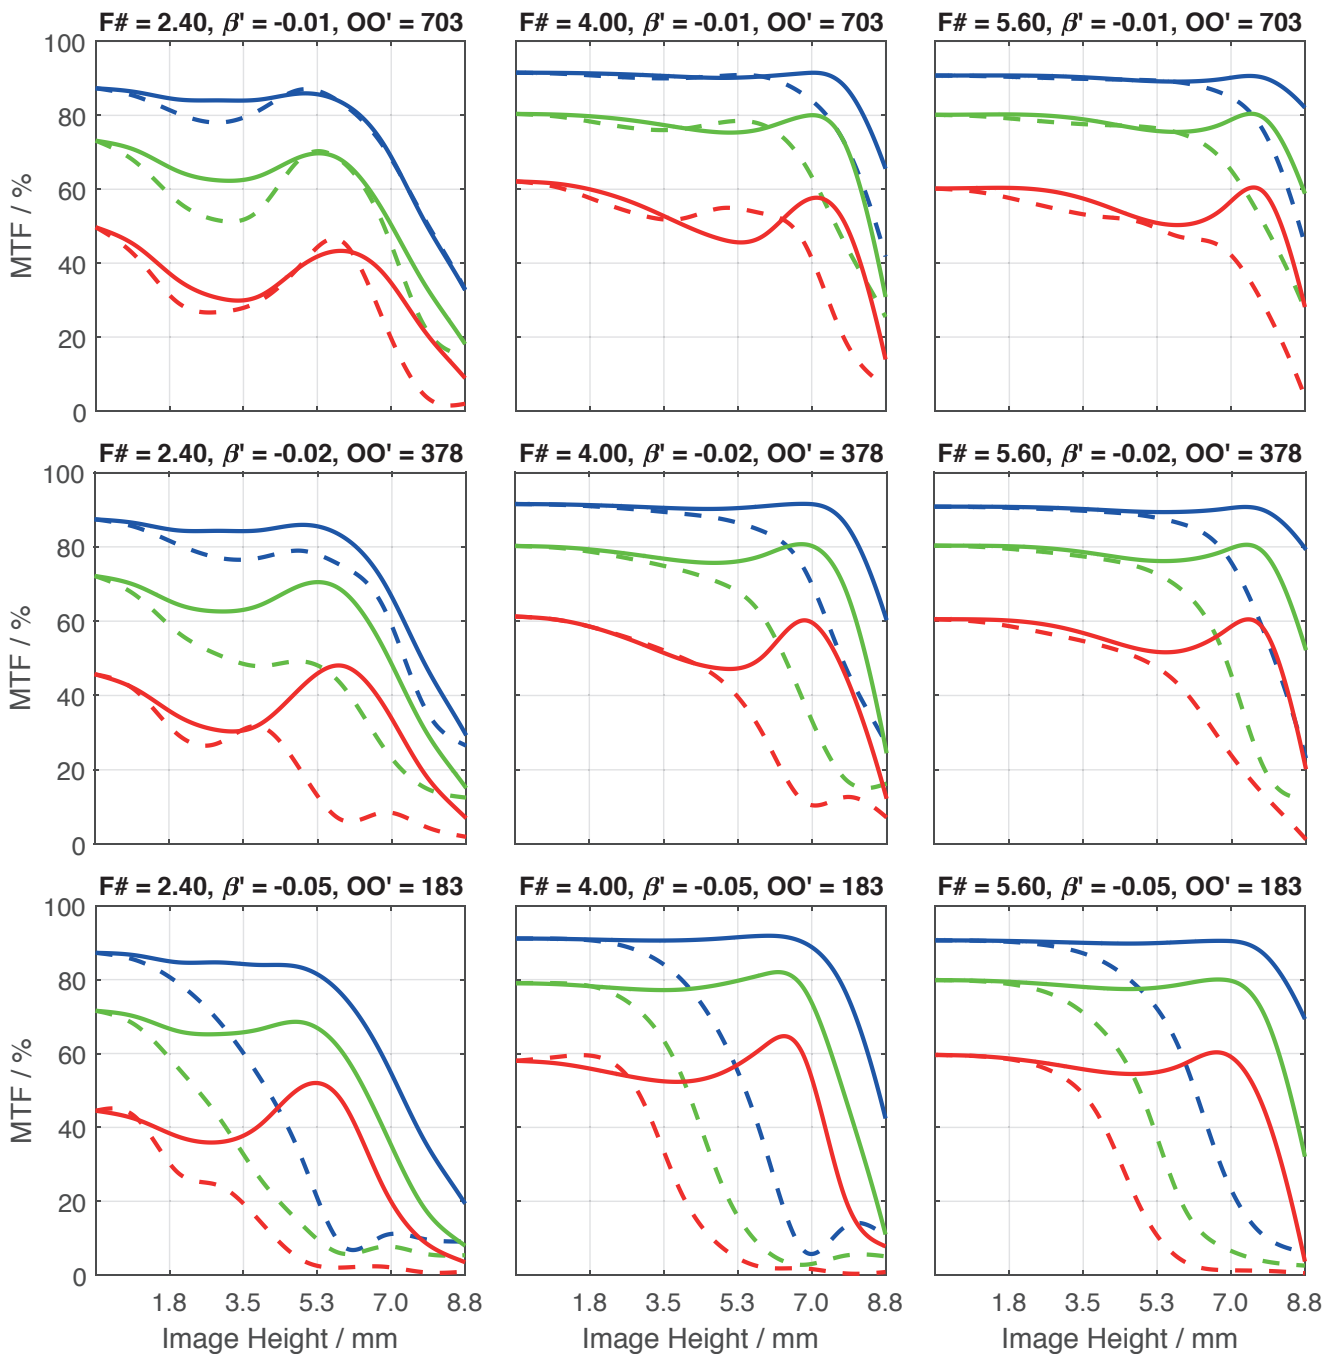

Accessories	Mount	Eff. Length	ID
Adapter	C-mount / CS-mount	5 mm	25081
	C-mount / M42 x 1	5.5 mm	1075817
Filter holder	M82 x 0.75	-	1078041
Ext. tube	C-mount	5 mm	39316
	C-mount	8 mm	39315
	C-mount	10 mm	39312

Annotation

Focal length	Nominal focal length
F/# range	Image space F-number range for infinity
Numerical aperture	Maximum image space numerical aperture for infinity
Max. sensor size	Image circle diameter
Max. angle of view	Angle of view associated with max. sensor size (Depending on rec. magnification range either for 1) infinity or 2) respective fixed magnification)
Rec. magnification range	Magnification range as recommended by Schneider-Kreuznach
Rec. working distance range	Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range
f'_{eff}	Effective focal length
SF	Distance between vertex of first lens surface and object space focal point
S'F'	Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)
HH'	Distance between principal planes
$\beta'P$	Pupil magnification (= exit pupil diameter / entrance pupil diameter)
SEP	Distance between vertex of first lens surface and entrance pupil
S'AP	Distance between vertex of last lens surface and exit pupil
$\sum d$	Distance between vertices of first and last lens surface
s'A	Flange focal distance (in air) for infinite object distance
β'	Magnification (= image height / object height)
OO'	Distance between object and image

Unless otherwise stated all dimensions in this data sheet are in mm.

Headquarters

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
☎ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices worldwide

America

☎ +1 800 645 7239 (East Coast)
☎ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Asia

☎ +86 755 8832 1170
✉ info@schneider-asiapacific.com