


产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)	
1	型号 (Model)	AZURE-DN2815SL3M	14	视场角 F.O.V (DxVxH)	1/1.2 2/3 1/2	
2	物料代码 (Material Code)	3. A01. 0102815S3			D	28 22.23 16.26
3	靶面格式 (Image Format)	1/1.2"			H	21 17.86 13.04
4	分辨率 (Resolution)	3MP			V	16.3 13.44 9.80
5	焦距 (Focal Length)	28mm	15	接口 (Mount)	C	
6	后截距 (Back Focus)	12.31mm	16	适用物距 (Suitable Distance)	3-∞m	
7	F值 (F/No.)	1.5	17	最佳物距 (Optimum Working Distance)	6.7m	
8	光圈 (Iris Type)	Manual	18	镀膜 (Coating)	400nm-1000nm	
9	畸变 (Distortion)	<-4.3%	19	外形尺寸 (Dimension)	φ 42.2 × 60.28mm	
10	通光口径 (Lens Effective Diameter)	前面 (Front)	φ 24.62mm	20	重量 (Weight)	g
		后面 (Back)	φ 15.02mm	21	工作温度 (Operating Temperature)	-20°C ~ +65°C
11	相对照度 (Relative Illuminate)	49%	22	镜头组成 (Lens Construction)	10-5	
12	光学总长 (TTL)	75mm	23	最大主光线入射角 (CRA)	6.42°	
13	设计波长 (Design Wavelength)	400~1000nm	24	滤镜尺寸 (Filter Thread)	M37.5 × 0.5	

Size:

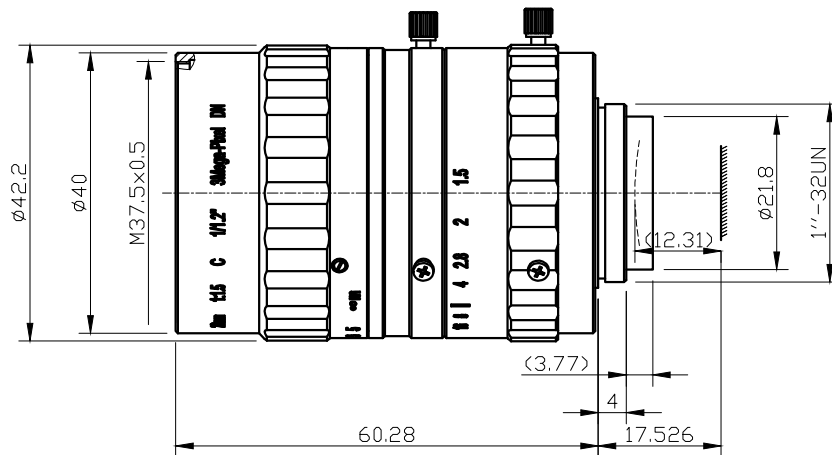

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd